




ROTOPLAT Jolly

65" DIAMETER
3/8" DIAMOND PLATE

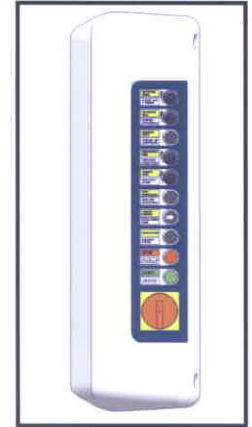


HINGED MAST FOR EASY HANDLING
AND ONE PERSON INSTALLATION



MANUAL FILM TAIL
HOLDING DEVICE



SAFETY STOP
AT ROLL CARRIAGE BOTTOM

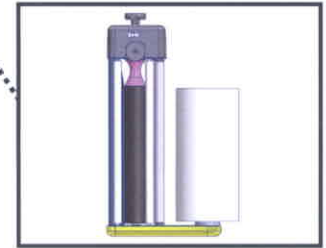

another Robopac innovative packaging solution from

ROTOPLAT Jolly

HEAVY DUTY SEMI-AUTOMATIC STRETCH WRAPPING TURNTABLE

TECHNICAL SPECIFICATIONS AND FEATURES

TURNTABLE SPECS

- 4,400 Lbs load capacity
- 65" plate diameter
- 3/8" raised diamond plate
- 16 heavy duty casters with sealed bearings
- 3" table height
- 20" distance between turntable & mast for additional safety

TURNTABLE DRIVE

- 1 HP AC motor
- 4-10 RPM rotation speed controlled by frequency changer
- 3/4" chain drive
- Soft start/stop controlled by frequency changer
- Automatic home position

TOWER AND CARRIAGE DRIVE

- Wrapping height 87" (std)
- Height sensing photocell
- 1/2 HP AC carriage motor
- Up & down carriage speed controlled by frequency changer
- 1/2" chain drive

STANDARD SUPPLY VOLTAGE

- 120 VAC / 1 Ph / 60 Hz

Parameters adjustable from control panel:

- Top and bottom wrap selector : 0 - 10
- Photocell sensing delay for top overlap
- Reinforcing wraps button (by impulse given)
- Turntable speed adjustment
- Carriage speed adjustment
- Table manual rotation jog
- Carriage up/down manual jog

- Start
- Stop
- Reset
- Main switch



Film delivery system:

- 20" film carriage with friction brake and stretch ratio manually adjustable
- Knob for brake release to easily attach the film to the pallet base
- Safety stop at film carriage bottom



OPTIONS

- Ramp for 65" plate diameter

