


# Robohood

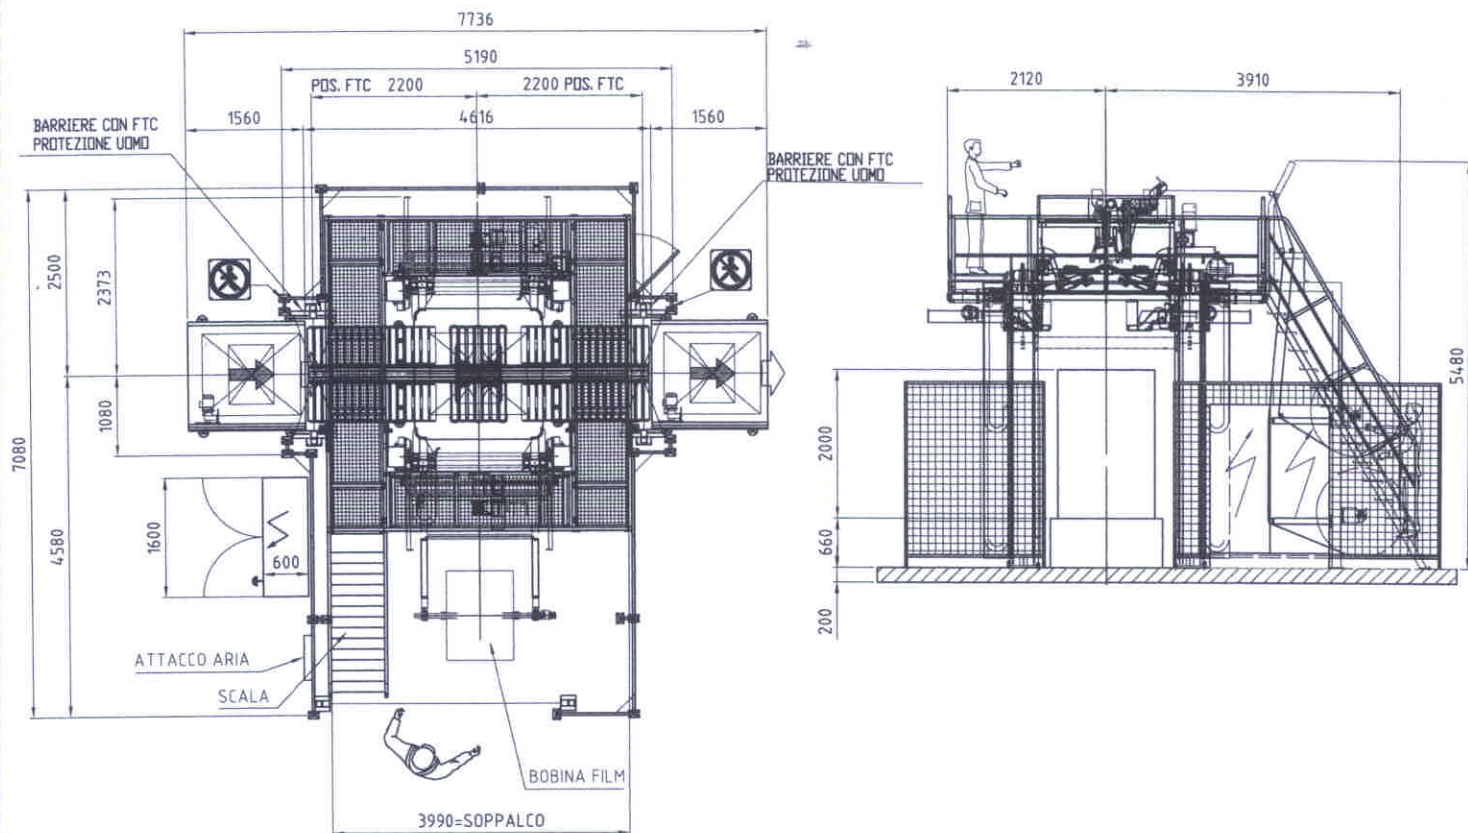

UNI EN ISO 9001:2000  
CERT. TÜV ITALIA n. 50 100 3608

**Robohood****INCAPPUCCIATORE PALLET CON POLIETILENE ESTENSIBILE  
PER PRODUZIONI FINO A 180 PALLETS/ORA****AUTOMATIC PALLET HOOD PACKING MACHINE WITH STRETCH FILM  
FOR PRODUCTION OUTPUT UP TO 180 PALLETS/HOUR****STRETCHHAUBEN-ÜBERZIEHER ZUM VERPACKEN VON PALETTE MIT  
POLYÄTHYLEN-SCHRUMPFOLIE FÜR PRODUKTIONEN VON BIS ZU 180 PALLETEN/PRO STUNDE****DATI TECNICI  
MACCHINA****TECHNICAL CHARACTERISTICS  
OF MACHINE****TECHNISCHE DATEN  
DER MASCHINE**

peso netto totale	total net weight	Gesamtgewicht netto	<b>6000 Kg</b>
altezza linea alimentazione	film feed height	Bodenhöhe	<b>min 660 mm</b>
potenza totale installata	total power installed	Installierte Gesamtleistung	<b>34 Kw</b>
tensione alimentazione STD	standard power supply	Versorgungsspannung Standard	<b>400V TR+N - 50Hz</b>
protezione impianto elettrico e motori	protection on electrical system and motors	Schutz der Elektroeinrichtung und Motoren	<b>IP 54</b>
pressione esercizio	operating air pressure	Betriebs-druck	<b>6 +/- 1 bar</b>
consumo aria	air consumption	Luftverbrauch	<b>200 NI/I'</b>

**DIMENSIONI PRODOTTO****PRODUCT DIMENSIONS****PRODUKTMAßE**

dimensioni min pallet	min pallet dimensions	Minimalmaße der Palette	<b>600 x 800 mm</b>
dimensioni max pallet	max pallet dimensions	Maximalmaße der Palette	<b>1300 x 1200 mm</b>
altezza STD pallet	standard pallet height	Standardhöhe der Palette	<b>2000 mm</b>